


Hi)

SMART VIDEO DOORBELL

INSTALLATION AND START-UP GUIDE

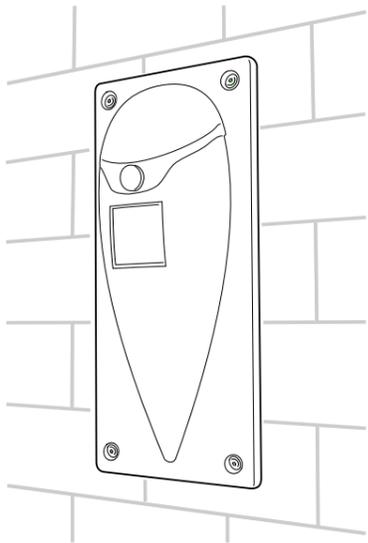

1 DOWNLOAD the app

The app is available from the App Store and Google Play (search for "Fenotek").




Tap START WITH Hi) to create your account and set up the wireless connection. When the BLUETOOTH PAIRING screen appears, go to step 2.


2 CONNECT the device to the wireless network

Remove the rubber cap from the back of the device.

Connect the device to a smartphone charger using the USB cable supplied:



The device turns on and initialises. When the screen displays "No connection", press the button:



Go back to the BLUETOOTH PAIRING screen on your smartphone and tap SCAN.

The device flashes orange during the pairing phase, and then the light turns green.

Follow the instructions to finish setting up the app (button names, password) before tapping CONTINUE AND INSTALL Hi). The device is now connected and can communicate with your smartphone. You can unplug the USB cable and continue to step 3.


If there are any problems, check that the information on your smartphone's CONNECTION screen is correct and start again.

3 INSTALL the device on the wall


Turn off the electricity before working on the electrical installation.

If you have any doubts about these instructions, contact a professional electrician.


Place the template where the device is to be fitted (recommended minimum height: 1.40 metres) and mark the four fixing holes. Check for straightness using a spirit level.

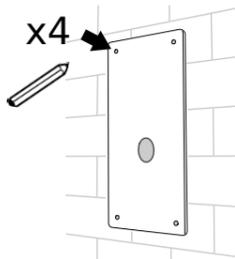


Drill the four fixing holes with a 6 mm drill bit and insert the wall anchors:

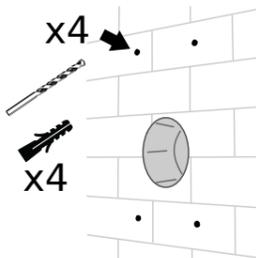

Using a screwdriver, pierce the rubber cap and feed the wires through:

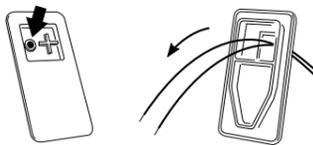

Connect the device according to this diagram:

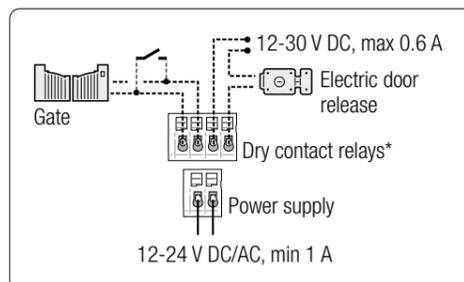


* Examples of use (equipment not supplied)

The wires can be connected in either direction (the device handles the polarity).

To connect a wire: 1. Push in the orange button. 2. Insert the wire. 3. Release the button.

Once the connections have been made, replace the rubber cap and tidy away any excess wire so that it does not obstruct the device's contact with the wall.


Attach the device to the wall using the screws and the Torx Security screwdriver supplied:

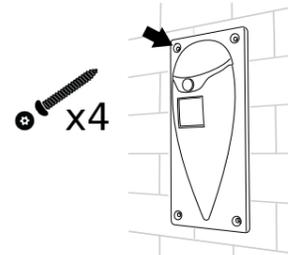

The Torx Security screwdriver is uncommon, so keep it somewhere safe.

Turn the electricity back on. The device lights up in blue and is ready to use!

Now all your visitors have to do is press this button to call you:

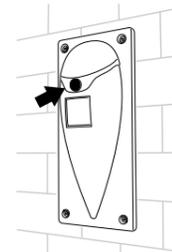

You can change the appearance of the device (light colour, on-screen text etc.) or add users by going to the SETTINGS section of the smartphone app:



If you have any doubts or questions, visit fenotek.com

Technical characteristics

- Power supply: 12-24 V DC/AC, min 1 A
- Max. relay current: 30 V/0.6 A
- Operating temperature: -20 °C to 50 °C.
- Protection rating: IP54
- Minimum USB current supply for initial pairing: 2 A
- Viewing angle: 130°

Box contents

- Hi) device
- Cardboard drilling template
- Micro-USB to USB type A cable
- Torx Security screwdriver and 4 screws
- 4 solid wall anchors
- This installation guide
- Terms of use

Meanings of symbols

- Do not dispose of the product with household waste. Take it to a waste collection point or approved centre to ensure it is recycled.
- Read this guide carefully before installing the device.

App Store is a trademark of Apple Inc. Google Play is a trademark of Google Inc. Torx is a trademark of Textron Inc. Fenotek, Hi) and their respective logos are registered trademarks of FENOTEK SAS.

FENOTEK SAS
15 Quai de Rive Neuve
13007 MARSEILLE
France
www.fenotek.com

